

Aritco 7000 Outdoor

- for outdoor usage

Aritco 7000 Outdoor

Aritco 7000 Outdoor lift is designed for outside use and equally suited to cold northern conditions as well as hot sunny climates. All outdoor lifts are delivered with yellow chromate guides to avoid corrosion.

Several advantages offered by Aritco 7000 Outdoor lift:

- Space efficient solution
- Corrosion class C3 for painted parts
- 'A' rated energy consumption according to VDI4707
- 95% recyclable materials
- Environmental classification by the Swedish Sunda Hus organization
- Patented screw/nut technology (no oil that can leak)
- The lowest maintenance and operating costs on the market






Certified partner:

Landmark Lifts 

29 Charter Gate, Quarry Park Close, Moulton Park, Northampton, NN3 6QB, United Kingdom
t: 01604 671007 f: 01604 671017 e: info@landmarklifts.co.uk w: www.landmarklifts.co.uk

Landmark Lifts is a trading name of N L C Nova Lift Co. Limited, a private limited company registered in England and Wales with company number 03423173 whose registered office address is: Nova House, 162 Pratling Street, Aylesford, Kent, ME20 7DH. VAT No: 725 5204 53 *Part of the NLC Nova Group*

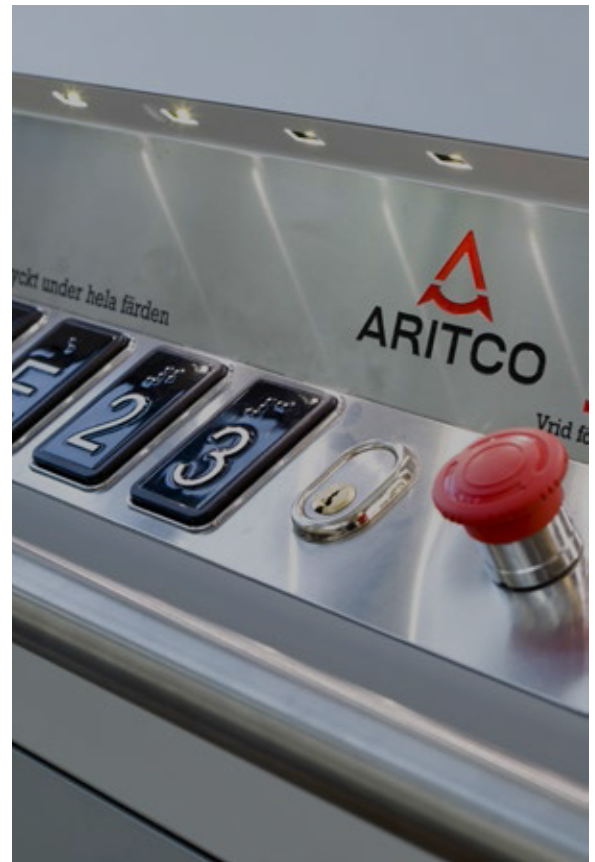

Aritco 7000 Outdoor

LIFT COLOUR

Can be painted in any RAL colour from the RAL Classic chart.

SHAFT PANELS


EPS or glass. Glass shaft panels only for windload up to 10 m/s

OPTIONS

- Machine side cladding
- Door canopies
- L-bracket
- Roof
- Heater


FLOOR

9 different floorings to choose from.

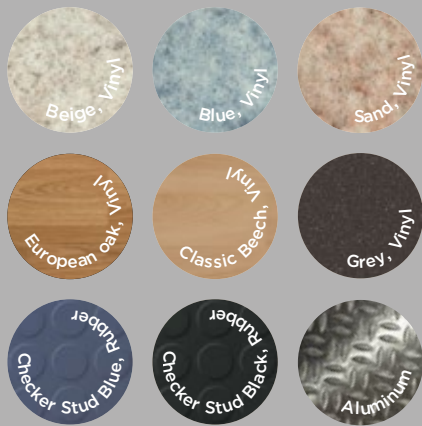

GLASS

4 different glass types to choose from.

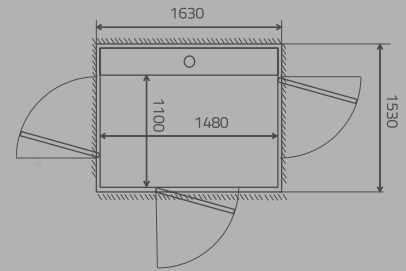

Size: 1100 x 1480 mm
Rated load: 410, 500 kg / 5, 6 pers.
Wheelchair: A or B with attendant, adjacent entry*

* National guidelines may apply. Wheelchair Type A and B according to EN 12183/EN 12184.

Product summary

<p>TOP HEIGHT</p> <p>Minimum 2240 mm</p>	<p>TYPE OF LIFT</p> <p>Platform lift intended for installation in public environments.</p>	<p>RATED SPEED</p> <p>Max 0,15 m/s</p>	<p>DRIVE SYSTEM</p> <p>Patented screw and nut system 2.2 kW motor</p>	<p>CONTROL FROM CARRIER CONTROL PANEL</p> <p>Hold to run - press and hold For installations outside Europe - One touch operation (press one time)</p>	<p>NUMBER OF FLOORS</p> <p>2 to 6 floors</p>
<p>INSTALLATION</p> <p>Recessed installation 50 mm below floor</p> <p>Installed directly on floor with 50 mm ramp</p>	<p>OUTDOOR INSTALLATION ENVIRONMENT</p>	<p>TRAVEL HEIGHT</p> <p>250-13 000 millimeter</p>		<p>WARRANTY</p> <p>Aritco 7000 Outdoor comes with a 24 month warranty. The screw and nut assembly has a 10 year warranty.</p>	<p>TECHNICAL COMPLIANCE</p> <p>European Machine directive 2006/42/EC European standard EN 81-41</p>
<p>Control voltage 24 V</p>				<p><i>Emergency lowering:</i> Battery-powered</p>	
<p>Max windload: 25 m/s</p> <p>For windload above 10 m/s lift must be fixed against a wall</p> <p>Corrosion class: C3 for painted parts</p>		<p>Conditions</p> <ul style="list-style-type: none"> • Environment conditions -5°C to +40°C. If installed in climates cooler than -5°C an external shaft is needed around the lift. • Snow load max 2kN/m² • Installation above ground level and with a drained pit <p>If these conditions can not be followed the lift must be installed in an external shaft.</p>			